

FORM PTO-1390
(REV. 11/2000)

U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE

TRANSMITTAL LETTER TO THE UNITED STATES
DESIGNATED/ELECTED OFFICE (DO/EO/US)
CONCERNING A FILING UNDER 35 U.S.C. 371

ATTORNEY'S DOCKET NO.

6680-6

INTERNATIONAL APPLICATION NO.

U.S. APPLICATION NO.

(If known, see 37 C.F.R. 1.5)

PCT/FR99/01627

TITLE OF INVENTION

INTERNATIONAL FILING DATE

PRIORITY DATE CLAIMED

CROSS-MEASUREMENT OF
ACOUSTIC FLOWMETER SIGNALS

06/07/99

10/07/98

APPLICANT(S) FOR DO/EO/US

CERTON, Dominique, MONOD, Cedric, PABOIS, Didier, PATAT, Frederic, and REMENIERAS, Jean-Pierre

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a FIRST submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a SECOND or SUBSEQUENT submission of items concerning a filing under 35 U.S.C. 371.
3. ☐ This express request to begin national examination procedures (35 U.S.C. 371(f)). The submission must include items (5), (6), (9) and (21) indicated below.
4. ☒ The US has been elected by the expiration of 19 months from the priority date (Article 31)
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2)))
 - a. ☐ is attached hereto (required only if not communicated by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
6. ☒ An English language translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☒ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are attached hereto (required only if not transmitted by the International Bureau).
 - b. ☒ have been communicated by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☒ An English language translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☐ An oath or declaration of the inventor(s) (35 U.S.C. 371(c)(4)).

U.S. APPLICATION NO.	INTERNATIONAL APPLICATION NO.	ATTORNEY'S DOCKET NUMBER
09/719907	PCT/FR99/01627	6680-6

10. ☐ An English language translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).

Items 11. to 20. below concern other document(s) or information included:

11. ☐ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☐ An Assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
14. ☐ A SECOND or SUBSEQUENT preliminary amendment.
15. ☐ A SECOND or SUBSEQUENT preliminary amendment.
16. ☐ A change of power of attorney and/or address letter.
17. ☐ A computer-readable form of the sequence listing in accordance with PCT Rule 13ter.2 and 35 U.S.C. 1.821 – 1.825.
18. ☐ A second copy of the published international application under 35 U.S.C. 154(d)(4).
19. ☐ A second copy of the English language translation of the international application under 35 U.S.C. 154(d)(4).
20. ☐ Other items or information:

21. <input checked="" type="checkbox"/> The following fees are submitted:	CALCULATIONS PTO USE ONLY	
Neither international preliminary examination fee (37 CFR 1.482) nor the international search fee (37 CFR 1.445(a)(2) paid to the USPTO and international Search Report not prepared by the EPO or JPO	\$1,000.00	
International preliminary examination fee (37 CFR 1.482) not paid to USPTO but International Search Report prepared by the EPO or JPO	\$ 860.00	
International preliminary examination fee (37 CFR 1.482) not paid to USPTO but international search fee (37 CFR 1.445(A)(2) paid to USPTO	\$ 710.00	
International preliminary examination fee (37 CFR 1.482) paid to USPTO but all claims did not satisfy provisions of PCT Article 33(1)-(4)	\$ 690.00	
International preliminary examination fee (37 CFR 1.482) paid to USPTO and all claims satisfied provisions of PCT Article 33(1)-(4)	\$ 100.00	
ENTER APPROPRIATE BASIC FEE AMOUNT	\$860.00	

U.S. APPLICATION NO.	INTERNATIONAL APPLICATION NO.	ATTORNEY'S DOCKET NUMBER
09/719907	PCT/FR99/01627	6680-6

Surcharge of \$130.00 for furnishing the oath or declaration later than [] 20 [X] 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$130.00	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total Claims	27 - 20 =	7	x \$ 18.00	\$126.00	
Independent Claims	2 x 3 =	0	x \$ 80.00	\$	
Multiple Dependent Claim(s) (if applicable)			+ \$270.00	\$	
TOTAL OF ABOVE CALCULATIONS				\$1,116.00	
<input type="checkbox"/> Applicant claims small entity status. See 37 CFR 1.27. The fees indicated above are reduced by 1/2.				\$	
SUBTOTAL				\$1,116.00	
Processing fee of \$130.00 for furnishing the English translation later the [] 20 [X] 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				\$130.00	
TOTAL NATIONAL FEE				\$1,246.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). \$40.00 per property					
TOTAL FEES ENCLOSED				\$1,246.00	
				Amount to be Refunded	\$
				Charged	\$1,246.00

a. ☐ A check in the amount of \$ _____ to cover the above fees is enclosed.


b. Please charge my Deposit Account No.50-0521 in the amount of \$1,246.00 to cover the above fees.
A duplicate copy of this sheet is enclosed.

c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. 50-0521. A duplicate copy of this sheet is enclosed.

d. ☐ Fees are to be charged to a credit card. **WARNING:** Information on this form may become public. **Credit card information should not be included on this form.** Provide credit card information and authorization on PTO-2038.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:


Joseph E. Levi
Reg. No.: 41,152
Clifford Chance Rogers & Wells LLP
200 Park Avenue
New York, NY 10166-0153
(212) 878-8564

09/719907

JCO1 Rec'd PCT/PTO 20 DEC 2000

CCR&W Docket No. 6680-6

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of : Dominique Certon, et al.
Serial No. : Not Yet Assigned
Filing Date : Filed Herewith
For : CROSS-MEASUREMENT OF ACOUSTIC
FLOWMETER SIGNALS
Examiner : Not Yet Assigned
Group Art Unit : Not Yet Assigned

Assistant Commissioner for Patents
Washington, D.C. 20231

PRELIMINARY AMENDMENT

December 20, 2000

Sir:

Prior to examination of the above-referenced application, please amend the above-referenced application as follows:

IN THE CLAIMS:

Please add claims 13-27.

Please amend claims 1, 2, 3, 4, 6, 8, 9, 11 and 12 as follows:

1. A method for measuring the displacement of a fluid into a conduit [(3)], by calculating a difference in ultrasound transit time between two transducers [(1, 2; 12, 13)] in one direction and in the other, characterised by the steps:
- of simultaneously exciting the two transducers [(1, 2; 12; 13)], then
- simultaneously measuring signals received at each one of the transducers originating from the other transducer,
and by a step of synchronously digitizing the signals received at each one of the transducers.

2. The method according to claim 1, characterised in that the step of

simultaneous excitation is performed using a single circuit [(16)].

3. The method according to claim 1 [or 2], characterised in that calculation of the difference in transit time comprises intercorrelating signals received at each one of the transducers and seeking an intercorrelation maximum.

4. The method according to claim 1 [or 2], characterised in that the calculation of the difference in transit time comprises intercorrelating received signals, calculating the Hilbert transform of intercorrelation, and seeking zeros of the Hilbert transform.

6. The method according to [one of claims 1-5] claim 1, characterised in that it comprises calibration step by measuring ultrasound propagation time outside the fluid vein.

8. The method according to [one of claims 1-7] claim 1, characterised in that it comprises a step of correcting values of ultrasound propagation time outside the fluid vein, as a function of temperature.

9. A driver circuit for a device for measuring displacement of the fluid in a conduit [(3)], with at least two transducers [(1, 2; 12, 13)] defining a measurement chord, the circuit comprising:

- means for simultaneously exciting [(16)] two transducers;
 - means [(17, 18)] for simultaneously measuring received signals at each one of the transducers originating from the other; and
 - switching means [(15)] for successively connecting the excitation means and measurement means to the terminals [(10, 11)] of the transducers,
- as well as means for synchronously digitizing signals received at one of the transducers.

11. A circuit according to claim 9 [or 10], characterised in that the measurement means comprise at least one amplifier [(19, 20)] and at least one analog/digital converter [(21, 22)].

12. A device for measuring fluid displacement in a conduit, comprising at least two transducers and a driver circuit according to claim 9 [, 10 or 11].

- 13. The method according to claim 2, characterised in that calculation of the difference in transit time comprises intercorrelating signals received at each one of the transducers and seeking an intercorrelation maximum.
14. The method according to claim 2, characterised in that the calculation of the difference in transit time comprises intercorrelating received signals, calculating the Hilbert transform of intercorrelation, and seeking zeros of the Hilbert transform.
15. The method according to claim 2, characterised in that it comprises a calibration

step by measuring ultrasound propagation time outside the fluid vein.


16. The method according to claim 3, characterised in that it comprises a calibration step by measuring ultrasound propagation time outside the fluid vein.
17. The method according to claim 4, characterised in that it comprises a calibration step by measuring ultrasound propagation time outside the fluid vein.
18. The method according to claim 5, characterised in that it comprises a calibration step by measuring ultrasound propagation time outside the fluid vein.
19. The method according to claim 2, characterised in that it comprises a step of correcting values of ultrasound propagation time outside the fluid vein, as a function of temperature.
20. The method according to claim 3, characterised in that it comprises a step of correcting values of ultrasound propagation time outside the fluid vein, as a function of temperature.
21. The method according to claim 4, characterised in that it comprises a step of correcting values of ultrasound propagation time outside the fluid vein, as a function of temperature.
22. The method according to claim 5, characterised in that it comprises a step of correcting values of ultrasound propagation time outside the fluid vein, as a function of temperature.
23. The method according to claim 6, characterised in that it comprises a step of correcting values of ultrasound propagation time outside the fluid vein, as a function of temperature.
24. The method according to claim 7, characterised in that it comprises a step of correcting values of ultrasound propagation time outside the fluid vein, as a function of temperature.
25. A circuit according to claim 10, characterised in that the measurement means comprise at least one amplifier and at least one analog/digital converter.
26. A device for measuring fluid displacement in a conduit, comprising at least two transducers and a driver circuit according to claim 10.
27. A device for measuring fluid displacement in the conduit, comprising at least two transducers and a driver circuit according to claim 11.--

REMARKS

Prior to consideration of the above referenced application, Applicants request entry of the above amendments. Applicants submit that these amendments do not constitute new matter and has full support in the specification as filed. The claims added by this Preliminary Amendment are deemed necessary to fully protect Applicant's invention.

Early and favorable consideration of the above referenced application in light of these preliminary amendments is earnestly solicited.

Respectfully submitted,



Joseph E. Levi
Reg. No.41,152

MAILING ADDRESS

CLIFFORD CHANCE
ROGERS & WELLS LLP
200 Park Avenue
New York, NY 10166-0153
(212) 878-8564

0974997 084401
T04T80" 2066T260

1/PRT.

09/719907

1 JCO1 Rec'd PCT/PTO 20 DEC 2000

.CROSS-MEASUREMENT OF ACOUSTIC FLOWMETER SIGNALS

5 The present invention relates to a device for measuring fluid flow in the liquid or gaseous phase, and more particularly to a device for flow measurement employing ultrasound.

10 Measurements of flow are used in instantaneous fluid flow metering and measuring applications in the liquid or gaseous phase and, for example, for metering fluids in sales transactions. The useful information supplied by the measurement system can be the instantaneous value of flow rate, a value averaged over time or average flow
15 rate, or a volume counted between two points in time. Instantaneous or average flow rate measurements are more particularly used in production processes where it is necessary to know, control or regulate the flow of one or several fluids participating in the process. Measurements
20 of volume, resulting from integrating flow rate measurements over a given time interval make it possible to perform metering notably employed for tank filling and/or emptying, as well as for sale of fluid volumes between customer and supplier. The volume thus
25 transferred should preferably be sufficiently accurately known to allow it to be used notably for calculating monetary values relating to the transaction.

Additionally, the flow measurement system should advantageously be of a stand-alone type only requiring
30 the provision of a source of electrical energy of the battery or standard AC utility 50 or 60 Hz line supply type.

In the general field of flow measurement and fluid flow measurement in particular, numerous techniques
35 employing ultrasound devices have been proposed. The majority of these systems employ the so-called transit time method. FIG. 1 shows a diagram of a prior art flowmeter, of the single-chord type. First and second

09719907-031401

ultrasound transducers 1 and 2 are provided at the side of the conduit 3 through which the fluid is flowing in a direction shown by arrow 4. In the example of FIG. 1, the conduit is cylindrical with a circular cross-section and the two transducers are arranged on diametrically opposed generating lines. Additionally, the two transducers are offset along conduit 2. A chord here is the line joining the centers of the transducers 1 and 2. It makes an angle θ with the main axis of flow, which is the axis of revolution of the conduit in the example of FIG. 1. L indicates the length of the chord and D the inside diameter of the conduit. If the first transducer 1 sends an ultrasound wave, it is detected, after propagation, by the second transducer 2 after a certain time shift T_{12} known as the transit time. If c is the speed of sound in the fluid and V the mean velocity of the fluid along the chord, T_{12} is given by the relation:

$$T_{12} = L/(c + V\cos\theta) \quad (1)$$

By reversing the function of each of the two transducers, the second transducer 2 becoming the sender and the first transducer 1 the receiver, a transit time T_{21} is measured given by:

$$T_{21} = L/(c - V\cos\theta) \quad (2)$$

Combining relations (1) and (2) makes it possible to obtain an expression for the mean velocity along the longitudinal axis of the conduit, by eliminating variable c . In the measurement where the speed of sound in the fluid is not necessarily known very accurately, and as this value depends on the nature, temperature and pressure of this moving medium, this allows us to avoid a source of error. Mean velocity v is now given by:

$$V = L(T_{21} - T_{12})/(2\cos\theta \cdot T_{12}T_{21}) \quad (3)$$

The expression for flow rate, Q , is obtained by multiplying mean velocity V calculated from (3) by the true flow cross-section which is $\pi D^2/4$ in the case of a circular cross-section, and, if necessary, taking account of certain correction factors discussed below :

$$Q = \frac{T_{21} - T_{12}}{(T_{12} - T_1)(T_{21} - T_2)} \times \frac{\pi \cdot L \cdot D^2}{8 \cdot \cos \vartheta} \times K_h \quad (4)$$

In this formula, T_1 and T_2 are respectively the propagation time of the ultrasound wave in the non-flow part of the stream, outside diameter D , for paths from the first transducer to the second, and from the second transducer to the first. T_1 and T_2 are equal except in the particular case where movement exists in these non-flow regions. These times correspond in particular to the time taken for the ultrasound wave to pass through the various layers of the materials constituting the transducer and the region of coupling between the transducer and the fluid vein. K_h is the hydraulic coefficient of the ultrasound flowmeter. Its purpose is to correct sampling at the time of measurement. In effect, the principle of transit time difference gives a measurement of mean velocity of flow along the measurement chord linking the transducers. This chord is not necessarily representative of the total flow surface area. This leads to an error in the calculated flow rate which depends on the actual velocity profile inside the cross-section of flow. The purpose of K_h is to correct this error. This coefficient is generally set after laboratory measurements for a certain range of flow rate values.

This type of flowmeter suffers from the following problems. One of the main factors influencing accuracy of an ultrasound flowmeter using the transit time principle is the accuracy with which the various time measurements $T_{12} - T_1$, $T_{21} - T_2$ and $T_{21} - T_{12}$ in formula (4) are obtained. As times T_{12} or T_{21} are of the order of some hundred microseconds, measuring these transit times with an accuracy of the order of 1/1000 does not present any particular problem. On the other hand, accurate measurement of the difference $T_{12} - T_{21}$ is much more difficult as, for small flow rates, this value can be less than 1 nanosecond. Accuracy of flow measurement is limited by the accuracy of this transit time difference.

Additionally, it is important, in certain flow measurement applications, to have real-time flow measurements available. Such applications typically appear in production processes, where a flow will then be regulated as a function of measurement results and where saving time in measurement can be extremely valuable in order to avoid possible deterioration of quality or loss of production. The flowmeter in figure 1 is poorly placed to supply real-time measurements considering that successive measurements of transit time in both directions are necessary.

The invention consequently sets out to resolve the problem of measurement accuracy in flowmeters and specifically that of resolving the problem of measuring flow in real time. A further aim of the invention is to improve the quality and speed of obtaining flow measurements estimated from measured transit times and to thus obtain real-time measurements.

More precisely, the invention provides method for measuring the displacement of a fluid in a conduit, by calculating a difference in ultrasound transit time between two transducers in one direction and in the other, characterised by the steps:

- of simultaneously exciting the two transducers, then
- simultaneously measuring signals received at each one of the transducers originating from the other transducer.

In one embodiment, the step of simultaneous excitation is performed using a single circuit.

A step of synchronously digitizing the signals received at each one of the transducers can be provided.

Calculation of the difference in transit time can comprise intercorrelating signals received at each one of the transducers and seeking an intercorrelation maximum.

In one embodiment, calculation of the difference in transit time comprises intercorrelating received signals, calculating the Hilbert transform of intercorrelation, and seeking zeros of the Hilbert transform.

5 In this case, the seeking of zeros is performed by polynomial interpolation of the Hilbert transform, preferably by interpolation using a third degree polynomial.

A calibration step by measuring ultrasound
10 propagation time outside the fluid vein can be provided.

This calibration step advantageously comprises measurement of transit time between the transducers for two fluids of different and known velocities.

In one embodiment, the method comprises a step of
15 correcting values of ultrasound propagation time outside the fluid vein, as a function of temperature.

The invention also provides a driver circuit for a device for measuring displacement of the fluid in a conduit, with at least two transducers defining a
20 measurement chord, the circuit comprising:

- means for simultaneously exciting two transducers;
 - means for simultaneously measuring received signals at each one of the transducers originating from the other; and
 - 25 - switching means for successively connecting the excitation means and measurement means to the terminals of the transducers,
- as well as means for synchronously digitizing signals. received at one of the transducers.

30 In one embodiment, the switching means comprise a multiplexing circuit.

The measurement means can comprise at least one amplifier and at least one analog/digital converter.

The invention finally provides a device for measuring
35 fluid displacement in a conduit, comprising at least two transducers and the driver circuit as above.

Further characteristics and advantages of the invention will become more clear from the detailed

description which follows of some embodiments of the invention provided by way of example with reference to the attached drawings.

Figure 1 shows, diagrammatically, a prior art flowmeter of the single chord type.

Figure 2 is a block diagram of the driver circuit according to the invention, for a device for ultrasound measurements of displacement of a fluid.

Figures 3 and 4 are a longitudinal cross section and a transverse cross section of a measuring device in an ultrasound flowmeter to which the driver circuit of the invention can be applied.

The invention provides a solution allowing substantial improvement in the measurement accuracy in fluid flow measuring devices, employing the difference in transit time between two transducers as a basis for measurement. It applies to known single-chord or multi-chord measuring devices of the type in figure 1, but also to measuring devices of the type shown in figure 3 or yet again to the applicant's co-pending patent application entitled "single-chord ultrasound flow meter".

The invention notably applies in measuring devices using similarities between signals representing transit times between transducers.

Using the above notation, a first method for calculating the difference between $T_{21} - T_{12}$ involves seeking the maximum of a correlation function between the two signals received after passage in the direction transducer 1 to transducer 2 and in the direction transducer 2 transducer 1. The maximum of this correlation function of the two signals is obtained through a value giving the difference in transit time. Such calculation of transit time difference is advantageously performed on digital signals as explained below. As the invention ensures the signals have a similar form, calculating correlation of the signals

makes it possible to obtain accuracy in transit time measurement which is well below the sampling step.

Another method for calculating the difference $DT = T_{21} - T_{12}$ involves seeking a zero crossing point of the Hilbert transform - represented by $Cs\tilde{r}(r)$ - of the intercorrelation function between the signals received after travel in the direction transducer 1 to transducer 2 and in the direction of transducer 2 to transducer 1. This other method has the advantage, compared to the preceding one, of reducing measurements skew, in other words the difference between the true value of the time difference and the estimated time, by a factor of 10 for a given signal-to-noise ratio. Again, calculation is advantageously performed on digital signals.

Let us call $s(n)$ and $r(n)$ the sequences of N points digitised at the same time by the converters of the electronic acquisition system, which correspond to the signals received. Seeking the difference DT can then be done in two steps: first, a raw estimation and then, if needs be, refinement of this estimation by interpolation of $Cs\tilde{r}(r)$ around its zero. In the first step, the Hilbert transform of intercorrelation is calculated from the two signals $r(n)$ and $s(n)$; rapid seeking of the zero of this function, situated between the maximum and minimum values of the function, is done by calculation, for example by a binary search technique. The Hilbert transform $Cs\tilde{r}(r)$ can be calculated by fast Fourier transform (FFT) as will now be explained. We start by calculating $R(f)$ and $S(f)$, the respective Fourier transforms of $r(n)$ and $s(n)$. Next, $S(f)$ is conjugated to obtain the conjugate $S^*(f)$, and the conjugate is multiplied by $R(f)$. The product $R(f) \cdot S^*(f)$ is then multiplied in the frequency domain by $j \cdot \text{sign}(-f)$, with $j^2 = -1$ and $\text{sign}(-f)$ a function equal to $+1$ for negative frequencies between $-f_e/2$ and 0 , and equal to -1 for positive frequencies between 0 and $f_e/2$, f_e being the sampling frequency. The Hilbert transform $Cs\tilde{r}(r)$ is

obtained by applying the inverse Fourier transform to the function $j.\text{sign}(-f).R(f).S^*(f)$.

A raw estimation of the zero of the Hilbert transform can be obtained, in a time interval limited by the
 5 maximum and minimum values of $Cs\tilde{r}(r)$, by comparing the signs of two successive points, starting with the maximum or minimum value.

One can then proceed, in a second step, to a more precise search for the zero of the Hilbert transform,
 10 proceeding by interpolation, for example by interpolating four points around the previously determined zero, referred to below as $A_i(x_i, y_i)$, i varying from 1 to 4. Advantageously, two points above zero and two points below zero are taken. Interpolation by a third order
 15 polynomial passing through the four points gives good results, and is an acceptable compromise between complexity and speed of calculation of the interpolation function. As the interpolation polynomial, we can use the Lagrange interpolation polynomial which is written:

$$20 \quad g_3(t) = \sum_{i=1}^4 \left[y_i \prod_{j \neq i} \frac{(t - x_j)}{(x_i - x_j)} \right]$$

or a normalised version of this polynomial or another interpolation polynomial. The delay DT being sought is the root of this polynomial, i.e. the real value to t_0 for which $g(t_0)=0$. The third degree polynomial can have 3
 25 real roots which can be obtained analytically starting from the coefficients of the normalised polynomial and, in this case, from these three solutions only the one comprised between the minimum and maximum of the previously calculated Hilbert transform $Cs\tilde{r}(r)$ is adopted.

30 This method makes it possible to obtain an accuracy in measuring the DT well below the sampling increment. For orders of magnitude of signal to noise ratio of the received signal of 50 dB, a standard deviation in time shift measurement of 0.2 nanoseconds can typically be
 35 obtained with a 50 ms signal sampling step.

The invention proposes, in order to obtain a correct value of the correlation between the signals, to have the signals received at each transducer as similar as possible. For this, the invention proposes simultaneously
5 exciting the two transducers of one measurement chord and then measuring, at the same time, the signals received at each of the transducers originating from the other transducer. This additionally has the advantage of allowing measurement in as short a time as possible as
10 measurements of transit time between the two transducers of one chord of measurement take place simultaneously.

The invention additionally makes it possible to considerably limit the influence of variations brought about by fluid movement. In prior art systems, fluid flow
15 could vary between successive transit time measurement in one or the other sense; contrary to this, in the invention, the measurements occur completely simultaneously whereby the flow can be considered as practically frozen during the measurement time. In other
20 words, the waves from a transducer 1 to transducer 2 and vice-versa pass through the fluid in the same state of turbulence.

The signals received can then be processed; for this, the invention proposes digitizing the signals received to
25 allow more accurate processing. This process is less costly and makes it possible to avoid problems of drift and control, specific to analog electronics, and allows the necessary calculations to then be performed using a microprocessor incorporated in the flowmeter system. As
30 the range of the ultrasound frequencies employed for flowmeters is comprised between several hundreds of kHz and several MHz, a sampling time of 50 ns to 500 ns is suitable for providing a full description of the signals received.

35 Figure 2 is a schematic diagram of a driver circuit according to the invention, for an ultrasound fluid displacement measuring device; the circuit in figure 2 corresponds to the simplest case of a measuring device

only comprising a single chord, i.e. two transducers. Terminals 10 and 11 in the circuit are intended to be connected to the transducers 12, 13; these terminals are connected to switching means 15, in the example of figure 2, a multiplexing circuit.

Additionally, the multiplexing circuit 15 is connected to the means for simultaneously exciting the two transducers; these means comprise a single sending circuit 16 designed to simultaneously excite the two transducers when the switching means connect the sending circuit to the terminals of the transducers. The switching means allow the sending circuit to drive the two transducers in parallel thereby guaranteeing that the exciting waveforms seen by each transducer are simultaneous and identical. The circuit is also connected to the means for simultaneously measuring the signals received at each of the transducers; in the embodiment, these measuring means comprise two measurement channels 17, 18, each of the measurement channels being intended for one of the transducers. Each measurement channel comprises an amplifier 19, 20 the output of which is connected to an analog/digital converter 21, 22. Preamplifiers 19, 20 are made to be as identical as possible as regards choice and matching of components, circuit layout and electronic settings, so as not to cause any delay or deformation of the signals received. The output from each analog/digital converter is connected to a computing circuit 23, for example taking the form of a microprocessor.

The circuit in figure 2 thus makes it possible, when the switching means connect the exciting means and the transducers, to simultaneously and identically excite the transducers. After exciting the transducers, the switching means connect the transducers to the measuring means, in order to simultaneously measure the signals received at each transducer originating from the other transducer. The principle of reciprocity applicable to transducers of the piezoelectric type ensures that the

signals gathered at each transducer are similar, so that the signals received only differ by their transit time.

The invention does not only apply to devices of the type in figure 1, but more generally to all types of measuring devices that include transducers, in which a difference in transit time is measured between pairs of transducers in one direction of transit and the other. Possible transducer configurations are notably described in the applicant's French patent application referred to above. Figures 3 and 4 are respectively a longitudinal and transverse cross section of a measurement device disclosed in that patent application, and to which the invention can be applied. The device in these figures comprises six transducers, 31-36, forming two groups each of three transducers, spaced along conduit 30. The transducers of each transducer group are regularly distributed over the periphery of the conduit. The transducers of one group has a directivity diagram covering at least two transducers of the other group. Thus, the directivity diagram of transducer 31 of the first group covers transducers 35 and 36 of the second group, i.e. the set of transducers of the second group except for transducer 34 which lies on the same generating line. The device of figures 3 and 4 makes it possible to generate, using six transducers, six measurement chords.

For the device of figure 3 and 4, a circuit is provided having means for simultaneously and identically exciting two transducers, and means for simultaneously measuring the signals received at two transducers; the circuit additionally comprises switching means for successively connecting the exciting means and the measuring means to any terminals of the two transducers selected from the six transducers of the device.

Measurement can for example be done in the following way:

- simultaneous measurement of T_{16} and T_{61} , by connecting transducers 31 and 36 to the exciting means and then the measurement means;
- 5 - simultaneous measurement of T_{15} and T_{51} , by connecting transducers 31 and 35 to the exciting means and then the measurement means;
- simultaneous measurement of T_{24} and T_{42} , by connecting transducers 32 and 34 to the exciting means and then the measurement means;
- 10 - simultaneous measurement of T_{26} and T_{62} , by connecting transducers 32 and 36 to the exciting means and then the measurement means;
- simultaneous measurement of T_{34} and T_{43} , by connecting transducers 33 and 34 to the exciting means and then the measurement means;
- 15 - simultaneous measurement of T_{35} and T_{53} , by connecting transducers 33 and 35 to the exciting means and then the measurement means;

where T_{ij} is measurement of the transit time between the
 20 transducers $3i$ and $3j$, with $1 \leq i, j \leq 6$.

One can thus calculate, in a minimum of time, the values of velocity or flow on the six chords; averaging these values gives a measurement of the velocity or flow which is achieved more rapidly, more accurately and more
 25 reliably than with known devices.

Thus, the invention applies to any ultrasound flowmeter device having a plurality of transducers fixed at selected positions on the wall of a conduit through which the fluid the flow of which it is desired to
 30 measure is flowing. The conduit can be a conduit of any type, size and material employed in practice. The transducers can be fixed to the wall by conventional means, known per se. The invention further proposes calibrating the propagation times of the ultrasound
 35 outside the fluid vein, as indicated below. In the framework of conventional setups for flow measurement using transit times, the times T_1 and T_2 are identical since the two waves follow the same paths in opposite

directions. Measurement of $(T1 + T2)/2$ can be done by successively filling the measurement sleeve fitted with the transducers with two pure liquids at a controlled temperature, of different velocities that are known very accurately; one can for example use water and ethyl alcohol. Transit time is measured for each pair of transducers in each medium. This leads to the obtaining of a linear system of two equations with the two unknowns, $T1 + T2$ and L ; resolution of the system makes it possible to store accurate values of $T1$ and L in memory for use of formula (4) in an operational situation.

The invention further proposes, if it proves that these values may vary significantly with temperature for the measurement result, to correct these values as a function of temperature. For this, a temperature probe is provided in the measurement device, and the values of transit time are corrected as a function of temperature. Clearly, in this case, the temperature sensor can be placed at various positions in the measurement device or close to it, so as to measure fluid temperature.

The device of the present invention was designed to meet the requirements determined by potential conditions of use of the equipment regardless of the medium and intended purpose (flow rate measurement, metering) envisaged. In particular, it provides repeatability of measurement of stable flow and exactness of measurement with respect to international standards. Similarly, it has very low sensitivity to dynamic conditions of the flow (hydraulic conditions upstream of the measurement system, changes in Reynolds number...) as well as vis-a-vis thermodynamic parameters of the fluid and the environment outside the equipment (pressure, temperature, humidity,...). The ultrasound system described in this invention consequently makes it possible, when compared to devices of the prior art, to measure fluid flow with improved accuracy, with low responsiveness to random fluctuations in the velocity due to turbulence, and

improved speed of measurement. The device according to the invention makes it possible, by reducing the number of transducers and introducing digital electronics, to limit the cost of the system, together with the cost of
5 maintenance and re-calibration.

This present invention is obviously not limited to the embodiments just described and illustrated; one could also use analog circuits or other means of switching apart from a multiplexing circuit.

091907.081401
"065T/60

09/719907

15

18

JCO1 Rec'd PCT/PTO 20 DEC 2000

TRANSLATION OF CLAIMS AMENDED UNDER ART. 19 PCT

5 1. A method for measuring the displacement of a fluid
in a conduit (3), by calculating a difference in
ultrasound transit time between two transducers (1, 2;
12, 13) in one direction and in the other, characterised
by the steps:

10 - of simultaneously exciting the two transducers (1,
2; 12; 13), then

- simultaneously measuring signals received at each
one of the transducers originating from the other
transducer,

15 and by a step of synchronously digitizing the signals
received at each one of the transducers.

2. The method according to claim 1, characterised in
that the step of simultaneous excitation is performed
20 using a single circuit (16).

3. The method according to claim 1 or 2,
characterised in that calculation of the difference in
transit time comprises intercorrelating signals received
25 at each one of the transducers and seeking an
intercorrelation maximum.

4. The method according to claim 1 or 2,
characterised in that the calculation of the difference
30 in transit time comprises intercorrelating received
signals, calculating the Hilbert transform of
intercorrelation, and seeking zeros of the Hilbert
transform.

35 5. The method according to claim 4, characterised in
that the seeking of zeros is performed by polynomial
interpolation of the Hilbert transform, preferably by
interpolation using a third degree polynomial.

09719907-081401

6. The method according to one of claims 1-5,
characterised in that it comprises a calibration step by
measuring ultrasound propagation time outside the fluid
5 vein.

7. The method according to claim 6, characterised in
that the calibration step comprises measurement of
transit time between the transducers for two fluids of
10 different and known velocities.

8. The method according to one of claims 1-7,
characterised in that it comprises a step of correcting
values of ultrasound propagation time outside the fluid
15 vein, as a function of temperature.

9. A driver circuit for a device for measuring
displacement of the fluid in a conduit (3), with at least
two transducers (1, 2; 12, 13) defining a measurement
20 chord, the circuit comprising:

- means for simultaneously exciting (16) two
transducers;
- means (17, 18) for simultaneously measuring
received signals at each one of the transducers
25 originating from the other; and
- switching means (15) for successively connecting
the excitation means and measurement means to the
terminals (10, 11) of the transducers,
as well as means for synchronously digitizing signals
30 received at one of the transducers.

10. A circuit according to claim 9, characterised in
that the switching means comprise a multiplexing circuit.

35 11. A circuit according to claim 9 or 10,
characterised in that the measurement means comprise at
least one amplifier (19, 20) and at least one
analog/digital converter (21, 22).

17
20





12. A device for measuring fluid displacement in a conduit, comprising at least two transducers and a driver circuit according to claim 9, 10 or 11.

5

09719907-0814-01

i 2

1/1

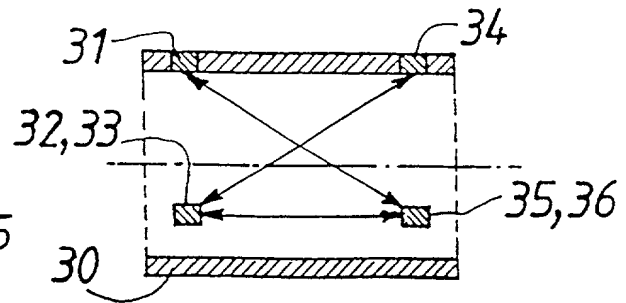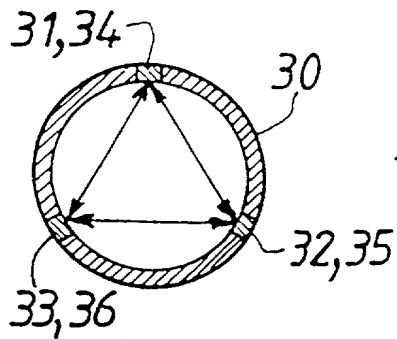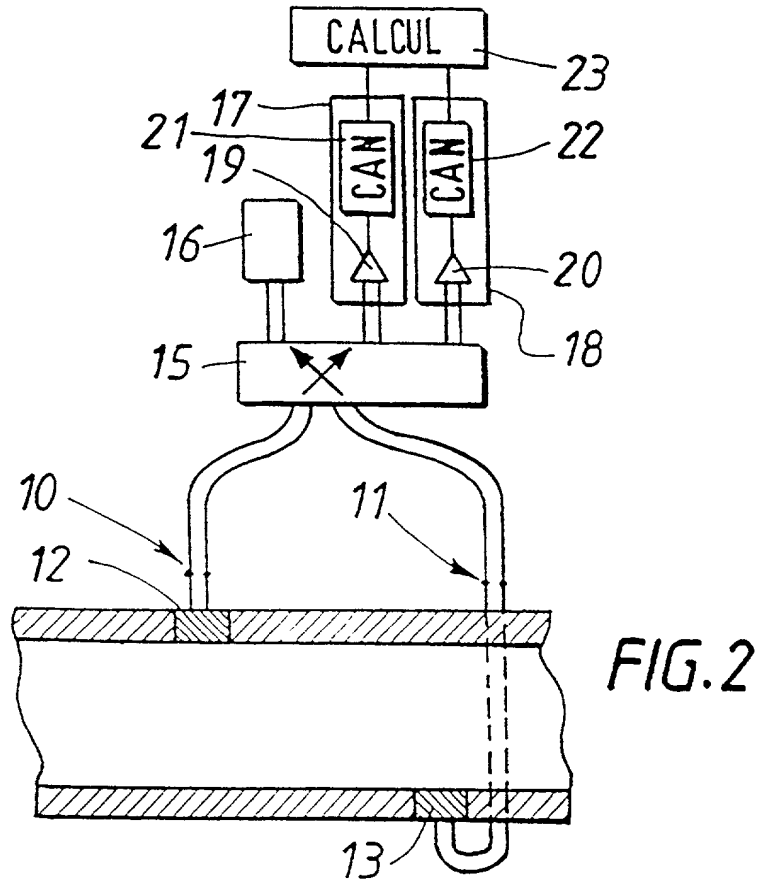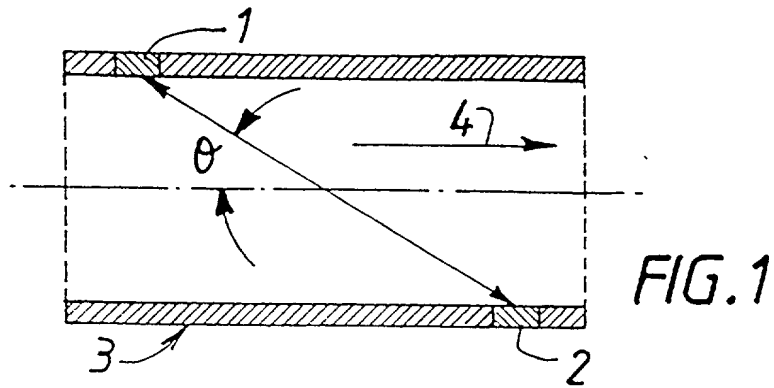

DECLARATION AND POWER OF ATTORNEY

As below named inventors, We hereby declare that:

My residence, post office address and citizenship are as stated below next to my name,

I believe I am the original, first and joint inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled:

CROSS-MEASUREMENT OF ACOUSTIC FLOWMETER SIGNALS

the specification of which was filed on December 20, 2000 and has:

☐ attached hereto

☒ an International Filing Date of July 6, 1999
and an International application number of 09/719,907
and amended on _____ (if applicable).

☒ was described and claimed in PCT Application No. FR99/01627
filed on July 6, 1999 and amended under Article 19 on _____

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose all information I know to be material to patentability in accordance with Title 37, Code of Federal Regulation, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

<u>Serial Number</u>	<u>Country</u>	<u>Filing Date</u>	<u>Priority Claimed</u> <u>(Y/N)</u>
98 08894	FR	7/10/98	Y
PCT/FR99/01627	PCT	7/6/99	Y

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

Serial Number

Filing Date

Status

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

And I hereby appoint:


John E. Kidd	Reg. No. <u>19,916</u>	Michael M. O'Shea	Reg. No. <u>35,631</u>
Victor Siber	Reg. No. <u>25,149</u>	Joel N. Bock	Reg. No. <u>36,456</u>
Margaret B. Kelley	Reg. No. <u>29,181</u>	Gerard P. Norton	Reg. No. <u>36,621</u>
Philip E. Roux	Reg. No. <u>31,295</u>	John T. Johnson	Reg. No. <u>37,363</u>
Michael J. Pantuliano	Reg. No. <u>18,971</u>	Frank C. Cimino	Reg. No. <u>39,945</u>
Joseph P. Kincart	Reg. No. <u>43,716</u>	Nada Jain	Reg. No. <u>41,431</u>
James V. Mahon	Reg. No. <u>41,966</u>	Mitchell S. Feller	Reg. No. <u>42,530</u>
Joseph Levi	Reg. No. <u>41,152</u>	David F. Ries	Reg. No. <u>43,046</u>
Victor J. Geraci	Reg. No. <u>38,157</u>	Anne M. Coughlin	Reg. No. <u>43,564</u>
C. Joseph Laughon, II	Reg. No. <u>31,389</u>	David S. Figatner	Reg. No. <u>44,106</u>
Leora Ben-Ami	Reg. No. <u>32,455</u>	Steven J. Lever	Reg. No. <u>46,871</u>
Robert D. Schaffer	Reg. No. <u>33,775</u>		

all of the firm of Clifford Chance Rogers & Wells LLP, 200 Park Avenue, New York, New York 10166-0153, my attorney with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith.

Address all communications to:

Joseph Levi, Esq.
Clifford Chance Rogers & Wells LLP
200 Park Avenue, New York, NY 10016
(212) 878-8564

Wherefore I request that Letters Patent be granted to me for the invention or discovery described and claimed in the foregoing specification and claims, and I hereby subscribe my name to the foregoing specification and claims, declaration, power of attorney, and this petition.

Full name of inventor # 1		<u>Dominique Certon</u>	
Inventor's signature		Date	<u>11-04-01</u>
Residence	<u>23 Allee Guillaume Louis 37200 Tours, France</u> <u>JRX</u>		
Citizenship	<u>France</u>		
Post Office Address	<u>23 Allee Guillaume Louis 37200 Tours, France</u>		

100 08440 20667260

2-00

Full name of inventor # 2	Cedric Monod		
Inventor's signature	Cedric Monod	Date	July 03, 2001
Residence	10 rue du Rendez-vous, 75012, Paris, France FRX		
Citizenship	France		
Post Office Address	10 rue du Rendez-vous, 75012, Paris, France		

Full name of inventor # 3	Didier Pabois		
Inventor's signature		Date	
Residence	7 rue de l'Orge, 91530, Saint Cheron, France		
Citizenship	France		
Post Office Address	7 rue de l'Orge, 91530, Saint Cheron, France		

Full name of inventor # 4	Frederic Patat		
Inventor's signature		Date	
Residence	Bois Chevreau, Voie Romaine, 37540 Saint Cyr-Sur-Loire, France		
Citizenship	France		
Post Office Address	Bois Chevreau, Voie Romaine, 37540 Saint Cyr-Sur-Loire, France		

Full name of inventor #5	Jean-Pierre Remenieras		
Inventor's signature		Date	
Residence	3 rue de la Pointe, Luneau, 37270 Montlouis, France		
Citizenship	France		
Post Office Address	3 rue de la Pointe, Luneau, 37270 Montlouis, France		

Full name of inventor # 2	Cedric Monod		
Inventor's signature		Date	
Residence	10 rue du Rendez-vous, 75012, Paris, France		
Citizenship	France		
Post Office Address	10 rue du Rendez-vous, 75012, Paris, France		

3-00

Full name of inventor # 3	<u>Didier Pabon</u>		
Inventor's signature	<i>Didier Pabon</i>	Date	08/04/07
Residence	7 rue de l'Orge, 91530, <u>Saint Cheron</u> , France <i>JRX</i>		
Citizenship	France		
Post Office Address	7 rue de l'Orge, 91530, Saint Cheron, France		

4-00

Full name of inventor # 4	<u>Frederic Patat</u>		
Inventor's signature	<i>Frederic Patat</i>	Date	11-04-01
Residence	Bois Chevreau, Voie Romaine, 37540 <u>Saint Cyr-Sur-Loire</u> , France <i>JRX</i>		
Citizenship	France		
Post Office Address	Bois Chevreau, Voie Romaine, 37540 Saint Cyr-Sur-Loire, France		

5-00

Full name of inventor #5	<u>Jean-Pierre Remenieras</u>		
Inventor's signature	<i>J Remenieras</i>	Date	11-04-01
Residence	3 rue de la Pointe, Luneau, 37270 <u>Montlouis</u> , France <i>JRX</i>		
Citizenship	France		
Post Office Address	3 rue de la Pointe, Luneau, 37270 Montlouis, France		